

## Unique automations with highest accuracy and stability


Slim and modular - yet fully motorized  
and integrated for ease of use

Large positioning range with 4 nm  
resolution closed-loop control

Ultra stable with smooth movement -  
minimum vibrations at any speed

Automation ready – short latency PC  
interface through open-source SDK  
and Python wrapper

Wide support for imaging techniques -  
compatible with all Nikon  
and selected 3rd party options



Learn more about the applications and exciting discoveries  
made by our customers at: [science.sensapex.com](https://science.sensapex.com)

Trusted by customers worldwide

## uMs microscopes

Please visit our webstore for pricing: [shop.sensapex.com](http://shop.sensapex.com)



### uMs-FN1 Upright microscope with motorized focus and 2-position objective changer

<b>Stand:</b>	Customized Nikon FN1
<b>Focus range:</b>	40 mm
<b>Resolution / repeatability:</b>	4 nm / 100 nm
<b>Dimensions:</b>	428 x 170 x 351 mm

Bottom part with transmitted light illumination can be detached for in vivo work

[shop.sensapex.com/product/ums-fn1](http://shop.sensapex.com/product/ums-fn1)

### uMs-MCU Motor controller

- Controls uMs-MXY translator and uMs-FN1 focus (closed-loop), as well as uMs-OBJ objective changer
- Ethernet interface for Sensapex controllers and PC control

**Dimensions:** 150 x 74 x 49 mm

[shop.sensapex.com/product/ums-mcu/](http://shop.sensapex.com/product/ums-mcu/)



### uMs-FXY Fixed stage

<b>Adjustable height:</b>	183 - 213 mm
<b>Leg foot print:</b>	32 x 113 mm
<b>Stage top size:</b>	500 x 419 mm

Metric thread pattern with pre-defined locations to install 1-8 uMp manipulators

[shop.sensapex.com/product/ums-fxy/](http://shop.sensapex.com/product/ums-fxy/)

## uMs microscopes

Please visit our webstore for pricing: [shop.sensapex.com](http://shop.sensapex.com)

### uMs-MXY Motorized translator

<b>Positioning range:</b>	120 x 85 mm (XY)
<b>Resolution / repeatability:</b>	4 nm / 100 nm
<b>Max. speed:</b>	10 mm/s
<b>Dimensions:</b>	445 x 380 x 50 mm

Metric and imperial table mounting supported

[shop.sensapex.com/product/ums-mxy/](http://shop.sensapex.com/product/ums-mxy/)



### uMs-BRE Microscope bridge

**Dimensions:** 503 x 400 x 66 mm

Tailored for uMs-FN1. *Ask about other microscope models*

[shop.sensapex.com/product/ums-bre/](http://shop.sensapex.com/product/ums-bre/)

### Motorized XY-stage bundle


<b>Positioning range:</b>	120 x 85 mm range
<b>Resolution / repeatability:</b>	4 nm / 100 nm
<b>Max speed:</b>	10 mm/s

Metric thread pattern with pre-defined locations to install 1-8 uMp manipulators

[shop.sensapex.com/product/motorized-ums-stage-including-installation-bridge/](http://shop.sensapex.com/product/motorized-ums-stage-including-installation-bridge/)



**Product diagram** Please visit our webstore for pricing: [shop.sensapex.com](http://shop.sensapex.com)

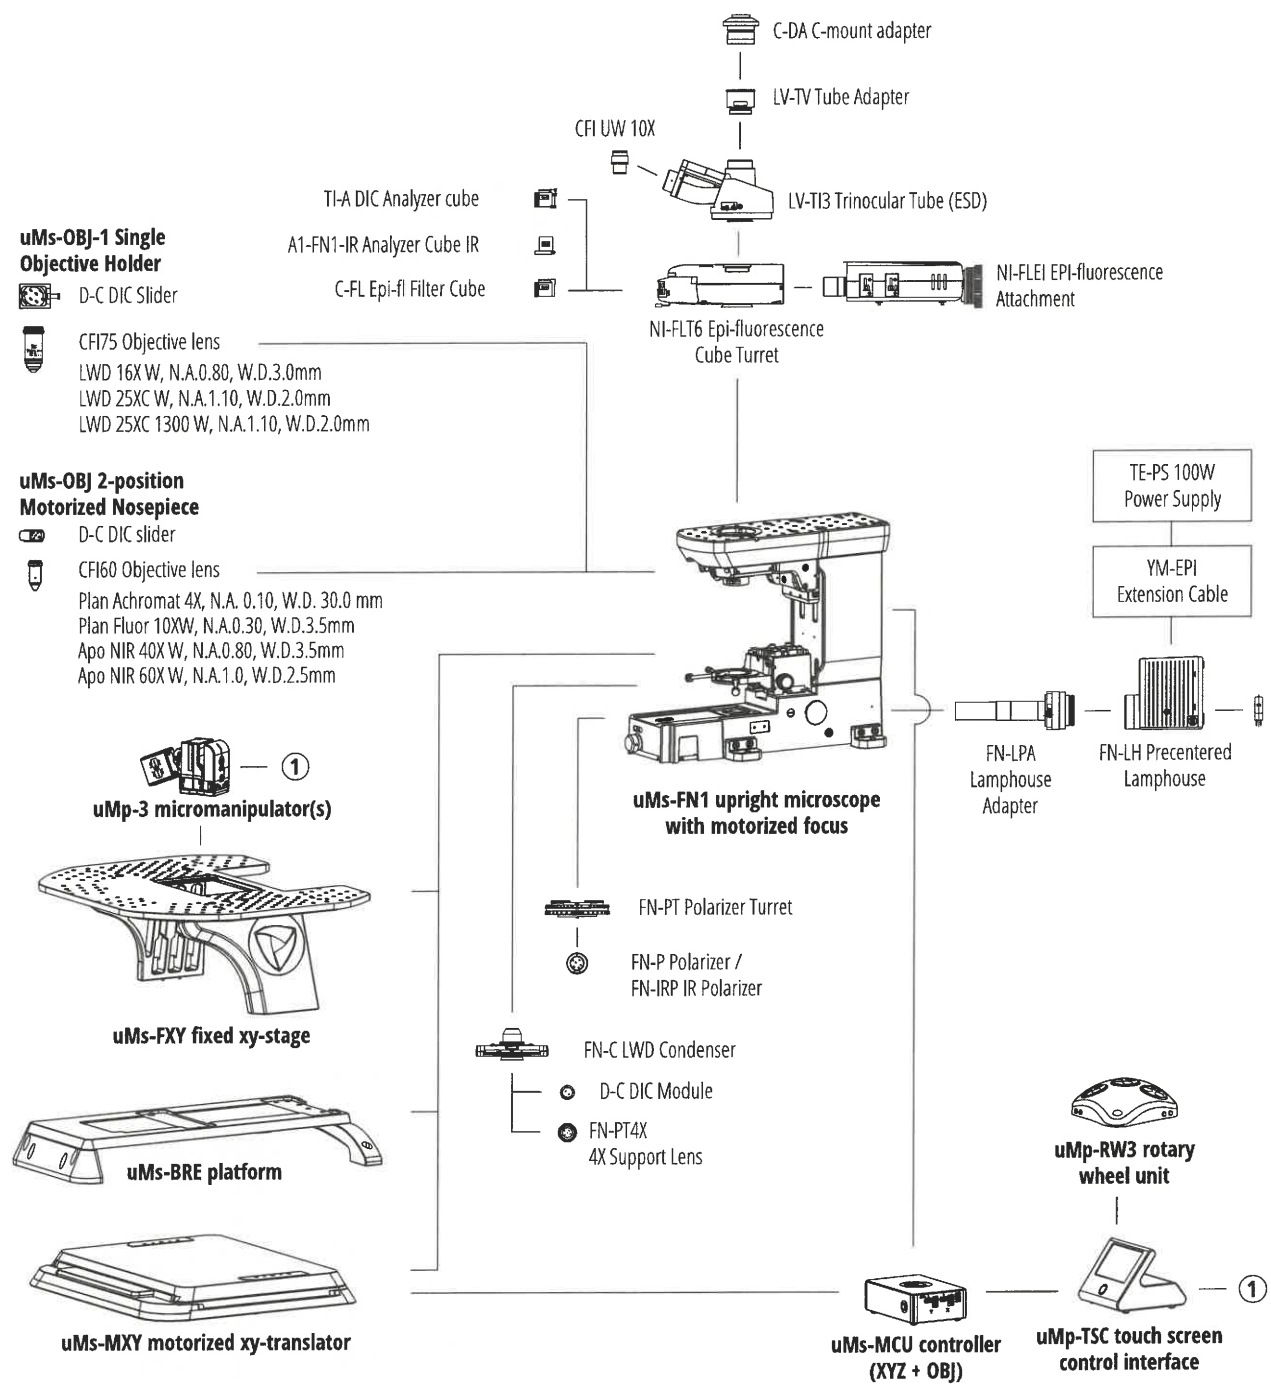

Sensapex products / Nikon standard items

**Headquarters**

Teknologiantie 13,  
 90590 Oulu, Finland  
 email: [sensapex@sensapex.com](mailto:sensapex@sensapex.com)  
 tel. +358-400-240955

**North America**

1201 N Market Street, Suite 111  
 Wilmington, DE 19801, USA  
 email: [sensapex@sensapex.com](mailto:sensapex@sensapex.com)  
 tel. (302) 510-1140

**Online**

[sensapex.com](http://sensapex.com)  
[shop.sensapex.com](http://shop.sensapex.com)  
[science.sensapex.com](http://science.sensapex.com)

COMPLIANT WITH CE, FCC, RoHS, REACH, WEEE, EN 60601-1, EN 60601-2-1, EN 60601-2-3, EN 60601-2-6, EN 60601-2-13, EN 60601-2-15, EN 60601-2-16, EN 60601-2-17, EN 60601-2-18, EN 60601-2-19, EN 60601-2-20, EN 60601-2-21, EN 60601-2-22, EN 60601-2-23, EN 60601-2-24, EN 60601-2-25, EN 60601-2-26, EN 60601-2-27, EN 60601-2-28, EN 60601-2-29, EN 60601-2-30, EN 60601-2-31, EN 60601-2-32, EN 60601-2-33, EN 60601-2-34, EN 60601-2-35, EN 60601-2-36, EN 60601-2-37, EN 60601-2-38, EN 60601-2-39, EN 60601-2-40, EN 60601-2-41, EN 60601-2-42, EN 60601-2-43, EN 60601-2-44, EN 60601-2-45, EN 60601-2-46, EN 60601-2-47, EN 60601-2-48, EN 60601-2-49, EN 60601-2-50, EN 60601-2-51, EN 60601-2-52, EN 60601-2-53, EN 60601-2-54, EN 60601-2-55, EN 60601-2-56, EN 60601-2-57, EN 60601-2-58, EN 60601-2-59, EN 60601-2-60, EN 60601-2-61, EN 60601-2-62, EN 60601-2-63, EN 60601-2-64, EN 60601-2-65, EN 60601-2-66, EN 60601-2-67, EN 60601-2-68, EN 60601-2-69, EN 60601-2-70, EN 60601-2-71, EN 60601-2-72, EN 60601-2-73, EN 60601-2-74, EN 60601-2-75, EN 60601-2-76, EN 60601-2-77, EN 60601-2-78, EN 60601-2-79, EN 60601-2-80, EN 60601-2-81, EN 60601-2-82, EN 60601-2-83, EN 60601-2-84, EN 60601-2-85, EN 60601-2-86, EN 60601-2-87, EN 60601-2-88, EN 60601-2-89, EN 60601-2-90, EN 60601-2-91, EN 60601-2-92, EN 60601-2-93, EN 60601-2-94, EN 60601-2-95, EN 60601-2-96, EN 60601-2-97, EN 60601-2-98, EN 60601-2-99, EN 60601-2-100.